


RPZ c/w Ball Valve -Y Strainer Combo Flomatic Plus

Series: PP-FLO-RPZ-ULBS

Size: DN15-DN50

Flomatic Plus Reduced Pressure Zone Devices are designed to protect potable water supplies in accordance with national plumbing codes and water authority requirements. This series can be used in a variety of installations, including the prevention of health hazard cross-connections in piping systems or for containment at the service line entrance.

This series features two in-line, independent check valves, captured springs and replaceable check seats with an intermediate relief valve. Its compact modular design facilitates easy maintenance and assembly access.

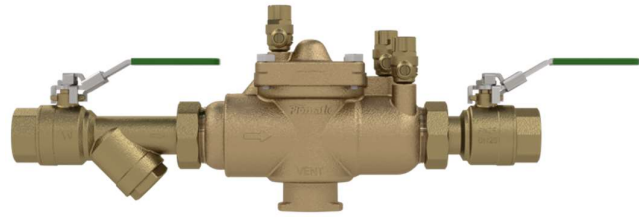

KEY FEATURES

- DN15-50mm sizes (1/2"-2") to suit wide range of installations
- Lead-free* materials for safer water (NCC Vol 3)
- Interchangeable union ball valve and strainer combinations
- Reduce assembly time and leak points with combined ball valve and strainer
- Lightweight and compact construction for easy installation
- Convenient in-line servicing with top access cover and no special tools required
- Easy check valve servicing with captured springs
- Lockable ball valves and tamper proof test cocks
- Low pressure drop flow passage
- Durable bronze body with PN16 rating
- Watermark approved for AS/NZS 2845.1 (Device) and WMTS-012 (Ball Valves)

* $\leq 0.25\%$ lead content according to NSF / ANSI / CAN 372

TECHNICAL DATA

Minimum Operating Temperature	0.5°C
Maximum Operating Temperature	80°C
Maximum Working Pressure	1600kPa
Body Material	Lead-Free* DR Bronze
Test Cock Material	Lead-Free* DR Brass
Checks Material	Polymer
Check Seat Material	Silicone Rubber Disc

PRODUCT CODES

PP-FLO-RPZ-015-ULBS	15mm RPZ c/w Ball Valve -Y Strainer Combo Flomatic Plus
PP-FLO-RPZ-020-ULBS	20mm RPZ c/w Ball Valve -Y Strainer Combo Flomatic Plus
PP-FLO-RPZ-025-ULBS	25mm RPZ c/w Ball Valve -Y Strainer Combo Flomatic Plus
PP-FLO-RPZ-032-ULBS	32mm RPZ c/w Ball Valve -Y Strainer Combo Flomatic Plus
PP-FLO-RPZ-040-ULBS	40mm RPZ c/w Ball Valve -Y Strainer Combo Flomatic Plus
PP-FLO-RPZ-050-ULBS	50mm RPZ c/w Ball Valve -Y Strainer Combo Flomatic Plus

CERTIFICATE



- **Device:** AS/NZS 2845.1 WM22155
- **Ball Valves:** WMTS-012 WM26080

Spring Material	Stainless Steel
Relief Valve Seat Material	Stainless Steel
Cover Material	Lead-Free* DR Bronze
Cover Bolt Material	Stainless Steel
Inlet Connection	Male BSP
Outlet Connection	Male BSP
Working Medium	Non corrosive liquids

Version 15 October 2024

1 800 284 287 | wattsau.com.au


WATTS®

RPZ c/w Ball Valve -Y Strainer Combo Flomatic Plus

Series: PP-FLO-RPZ-ULBS



Size: DN15-DN50

DIMENSION DATA

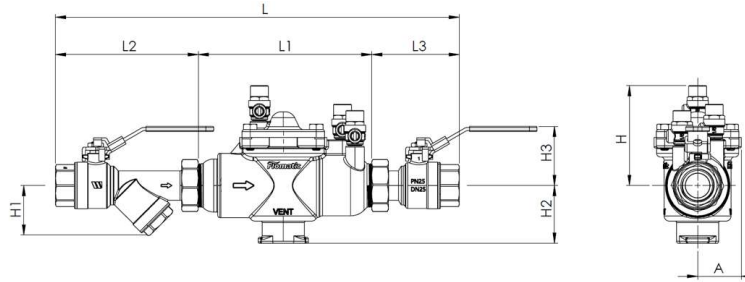

RPZ Kit Dimension									
Size	A	H	H1	H2	H3	L	L1	L2	L3
DN15	42	96.2	48.3	55.7	57	382.3	184	134.2	81
DN20	42	96.2	48.3	55.7	57	381.3	184	133.7	80.5
DN25	42	96.2	48.3	55.7	57	388.8	184	137.4	84.3
DN32	73.6	120.9	87.1	83.8	94.7	600.4	278.4	217.5	127.9
DN40	73.6	120.9	87.1	83.8	94.7	600.4	278.4	217.5	127.9
DN50	73.6	120.9	87.1	83.8	94.7	600.8	278.4	217.7	128.1

CHARACTERISTIC CURVES

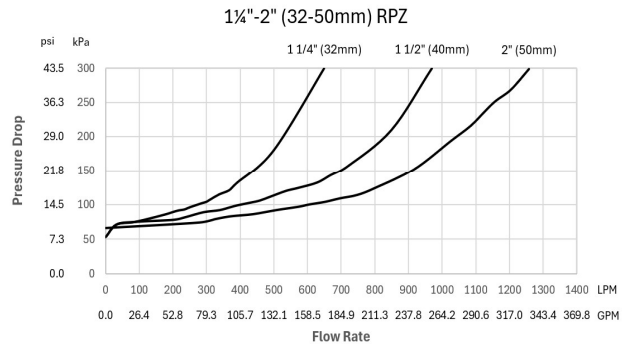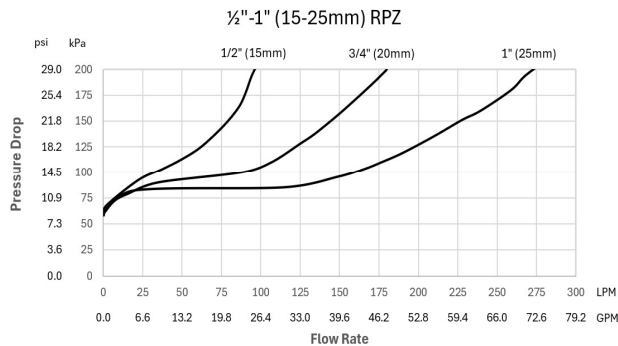

SPARE PARTS

PP-FLO-RPZ-15-25-CK1	First Check Valve for DN15/20/25 RPZ
PP-FLO-RPZ-32-50-CK1	First Check Valve for DN32/40/50 RPZ
PP-FLO-RPZ-15-25-CK2	Second Check Valve for DN15/20/25 RPZ
PP-FLO-RPZ-32-50-CK2	Second Check Valve for DN32/40/50 RPZ
PP-FLO-RPZ-15-25-RV	Relief Valve Repair Kit for DN15/20/25 RPZ
PP-FLO-RPZ-32-50-RV	Relief Valve Repair Kit for DN32/40/50 RPZ
PP-FLO-RPZ-15-25-T	Total Repair Kit for DN15/20/25 RPZ (Includes First Check, Second Check, Relief Valve, Spring and Seat)
PP-FLO-RPZ-32-50-T	Total Repair Kit for DN32/40/50 RPZ (Includes First Check, Second Check, Relief Valve, Spring and Seat)

TYPICAL INSTALLATION

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product. Inquire with governing authorities for local installation requirements.

Every care has been taken in the preparation of these instructions, which have been issued as a guide only. Compliance with the requirements of local Authorities is required at all times. These requirements may change from time to time. Always be aware of the local requirements. Subject to any statutory obligations and manufacturers warranties no liability can be accepted for any losses, consequential or otherwise which may arise or be said to have arisen from relying upon the contents of this information as to the fitness of any particular product for any particular purpose, use or application. Watts Australia Pty Ltd reserves the right to modify designs and specifications and to withdraw and introduce products at any time without notice.