
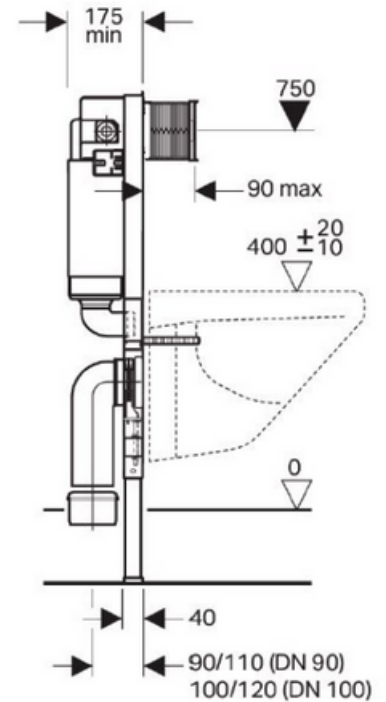


Geberit Kappa Undercounter Concealed Cistern Duofix with Frame

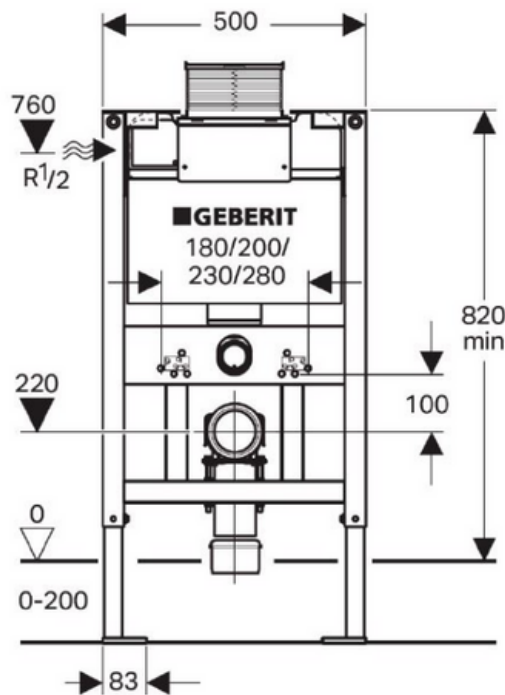

Characteristics

- Self-supporting frame, powder-coated
- Adjustable flush volume
- Galvanized feet
- Feet adjustable 0–20 cm
- Rotatable foot plates
- Foot plate depth suitable for installation in U-profiles UW 50 and UW75 and Geberit Duofix system rails
- Concealed cistern with top or front actuation
- Water supply connection on the left

Scope of delivery

- Water supply connection R 1/2", with integrated angle stop valve
- Protection box for service opening
- 2 protection plugs
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Adapter socket made of PE-HD, \varnothing 90 / 110 mm
- 2 threaded rods M12
- Fastening material

Application purposes

- For installation in part or room-height prewall installations
- For wall-hung WCs with fastening distance 18–28cm
- For dual flush
- For floor constructions 0–20 cm

Technical data

Flow pressure	10–1000 kPa
Maximum operating temperature, water	25 °C
Flush volume, factory setting	4.5 and 3 l
Flush volume small	3 l

Art. no.	B	H	T
111.263.00.1	50 cm	82 cm	16.5 cm