


Geberit Sigma Duofix concealed cistern for Wall Hung Pans 8 cm, 4.5 / 3 litres

■ GEBERIT

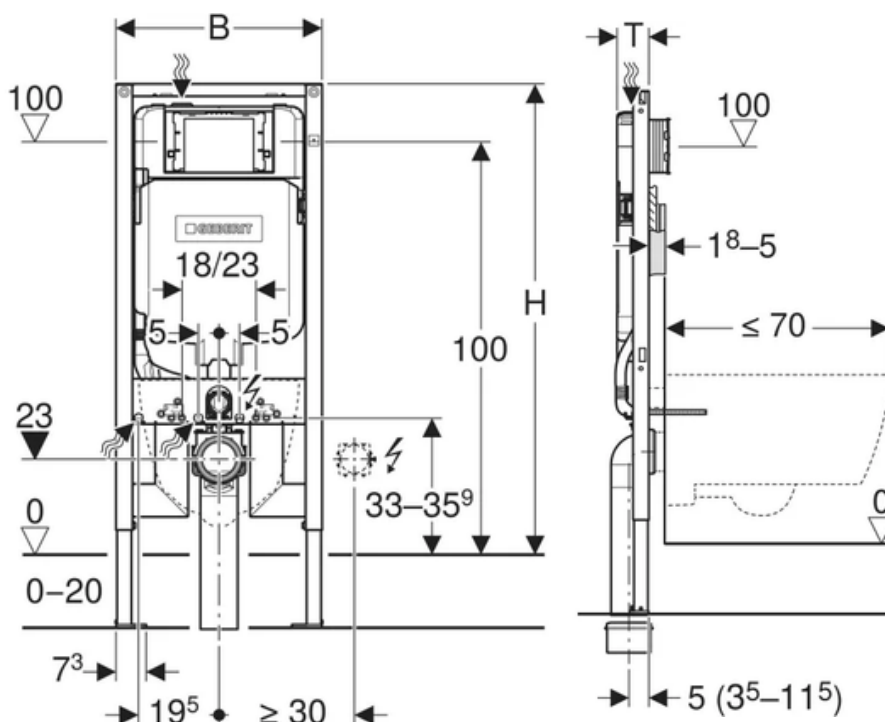

Characteristics

- Statically self-supporting frame, protected against corrosion with powder coating
- Frame with \varnothing 9 mm drilling holes for fastening in wood frame construction
- Galvanized feet
- Non-slip Leg supports infinitely variable in height
- Foot plate depth suitable for installation in U-profiles UW 50 and Geberit Duofix system rails
- Connection bend can be installed without tools at different depths & mounted vertically with front flush
- Fastening for connection bend, sound-absorbing
- Concealed cistern with front actuation & fully insulated against condensation • Cistern fulfils
- Immediate post flush possible with factory setting
- Water supply connection on the top left & dezincification-resistant
- Protection cover box for service opening protects against moisture and dirt
- Protection box for service opening can be cut to length, suitable for surface-even actuator plates
- Fastening option for electrical connection

Technical Data

- Flow pressure 10–1000 kPa
- Operating temperature, water max 25 °C
- Flush volume, factory setting 4.5 / 3 l
- Flush volume large, adjustment range 4.5 / 6 / 7.5 l
- Flush volume small, adjustment range 3–4 l

Scope of delivery

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, \varnothing 90 mm
- Connection bend 90° made of PE-HD, \varnothing 90 mm
- Sleeve made of EPDM, \varnothing 90 / 110 mm
- Pipe bracket support
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Application purposes

- For drywall construction
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For wall-hung WCs
- For wall-hung WCs with projection up to 70 cm
- For single flush, dual flush or stop-and-go flush
- For floor constructions 0–20 cm

Art. no.	B	H	T
111.698.00.1	50 cm	114 cm	8 cm